

10/13/99
JCS94 U.S. 8-979

J. PATTERSON
WADDEY, JR.
WARD D. LANQUIST, JR.
JAN WAYNE BEAVERS
C. GARVIN, JR.*
A. K. THOMAS
EMILY A. SHOUSE
DAVID B. PIEPER*
LARRY W. BRANTLEY*
RICHARD S. MYERS, JR.*

REGISTERED PATENT AGENT
HAROLD W. HILTON

*LICENSED IN A STATE
OTHER THAN TENNESSEE

LAW OFFICES
WADDEY & PATTERSON
A PROFESSIONAL CORPORATION
SUITE 2020, BANK OF AMERICA PLAZA
414 UNION STREET
NASHVILLE, TENNESSEE 37219
615-242-2400
FAX 615-242-2221

PATENTS, TRADEMARKS,
COPYRIGHTS, TRADE DISPUTES,
UNFAIR COMPETITION,
COMPUTER LAW, LICENSING,
AND RELATED LITIGATION

ALABAMA OFFICE
SUITE 302, AMSOUTH CENTER
200 CLINTON AVENUE
P O BOX 18485
HUNTSVILLE, ALABAMA 35804
256-535-4400
FAX 256-535-4402

October 13, 1999

Writer's Direct E-mail Address:
rsm@iplawgroup.com

Assistant Commissioner for Patents
Box New Patent Application
Washington, DC 20231

VIA EXPRESS MAIL LABEL
NUMBER EL428170884
ATTORNEY'S DOCKET NO.: N-4441

Dear Sir:


Enclosed for filing is the following:

1. Original utility patent application for the invention by David Simpson, et al of a "Multi-Layer Stretch Cling Film" which includes:
 - a. specification;
 - b. 1 page of drawings;
 - c. declaration and power of attorney of the inventors
2. Original filing fee in the amount of \$461.00.
3. Statement Claiming Small Entity Status -Small Business Concern
4. Self-addressed return post card.

You are authorized to charge any deficiency or credit any overpayment associated with the filing of this application to Deposit Account 23-0035.

Very truly yours,

WADDEY & PATTERSON

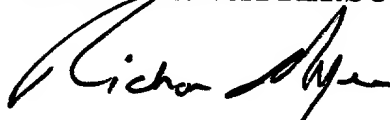

Richard S. Myers, Jr.
Registration Number 42,022

RSM/mp
enclosures

Applicant or Patentee: David Simpson, et al.

Attorney's Docket No. N-4441

For: MULTI-LAYER STRETCH CLING FILM

**VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL ENTITY STATUS
(37 CFR 1.9(f) & 1.27(c))—SMALL BUSINESS CONCERN**

I hereby declare that I am an officer of the small business concern identified below:

NAME OF SMALL BUSINESS CONCERN: Quintec Films

ADDRESS OF SMALL BUSINESS CONCERN: P.O. Box 459, 1624 Railroad Avenue,
Shelbyville, TN 37160

I hereby declare that the above identified small business concern qualifies as a small business concern as defined in 13 CFR 121.12, and reproduced in 37 CFR 1.9(d), for purposes of paying reduced fees to the United States Patent and Trademark Office, in that the number of employees of the concern, including those of its affiliates, does not exceed 500 persons. For purposes of this statement, (1) the number of employees of the business concern is the average over the previous fiscal year of the concern of the persons employed on a full-time, part-time or temporary basis during each of the pay periods of the fiscal year, and (2) concerns are affiliates of each other when either, directly or indirectly, one concern controls or has the power to control the other, or a third party or parties controls or has the power to control both.

I hereby declare that rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the invention, entitled MULTI-LAYER STRETCH CLING FILM by inventors David Simpson, et al., described in the specification filed herewith.

If the rights held by the above identified small business concern are not exclusive, each individual, concern or organization having rights in the invention is listed below and no rights to the invention are held by any person, other than the inventor, who would not qualify as an independent inventor under 37 CFR 1.9(c) if that person made the invention, or by any concern which would not qualify as a small business concern under 37 CFR 1.9(d), or a nonprofit organization under 37 CFR 1.9(e).

There are no such persons, concerns, or organizations.


I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date at which status as a small entity is no longer appropriate. (37 C.F.R. 1.28(b))

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

SECRET 5006460

NAME OF PERSON SIGNING: David Simpson

TITLE OF PERSON IF OTHER THAN OWNER: Technical Director

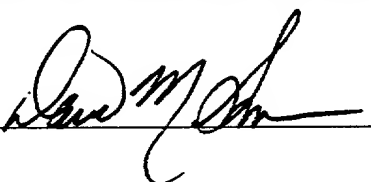SIGNATURE  DATE 13 OCT 99

666707"60067450

MULTILAYER STRETCH CLING FILM

FIELD OF THE INVENTION

The present invention relates to multi-layer stretch cling films having at least seven individual layers in the film composition offering acceptable cling performance, good balance of strength and good elongation properties.

BACKGROUND OF THE INVENTION

In commercial packaging art, individual articles as well as bundles of articles, including bundles of articles on pallets, are frequently packaged using so called stretch cling film in a stretch wrapping technique. In the stretch wrapping technique, a thin web of film is stretched and applied under tension around the articles to be wrapped or bundled. After wrapping is complete, the film attempts to relax and thus applies a compressive force on the bundled

articles prohibiting movement. It is desired that the stretch film have some inherent cling such that it will adhere to itself, and prevent relaxation back to its unstretched state so that the film will not unwrap and cause slippage of the stretched overlaid film layers.

5 As stated above, stretch wrap films are typically used in wrapping palletted loads of boxes, as well as individual boxes or articles such as furniture and the like. The stretch wrap films of the present invention may be applied various techniques such as by hand or may be applied using a mechanical apparatus specially designed to wrap pallets, for example. In one procedure for
10 using stretch wrap films of the present invention, the load to be wrapped is to be placed upon a platform, or turntable, which is made to rotate and in so doing, to take up stretch wrap film supplied from a continuous roll. Rotational speeds are typically 5 to 50 revolutions per minute. Regardless of the specific wrapping procedure used, at the completion of the wrapping, the stretch wrap
15 film is cut and attached to the underlying layer by cling, tack sealing, adhesive tape, spray adhesives, and the like. When the stretch film of the present invention is applied by hand, the operator typically holds an applicator or wrapping tool that holds the stretch wrap film roll. After the operator completes wrapping, the stretch wrap film is cut.

20 Mechanical properties that are important in stretch films include, for example, how far the film can be stretched (i.e., stretchability), the film's

resistance to stretching, film tensile strength, film puncture resistance, film tear resistance and cling force.

5

SUMMARY OF THE INVENTION

The present invention is a novel multi-layer stretch film comprising at least 7 layers and having excellent mechanical properties and stretch film performance when compared to stretch films made using fewer than seven layers.

10

The film comprises two outer, or skin layers that have moderate to high controlled cling and low blocking characteristics, at least five internal layers to assist in producing mechanical strength and stretchability. The resins used in the film composition include polypropylene (PP), ethylene propylene copolymers, low density polyethylene (LDPE), linear low density polyethylene (LLDPE), medium density polyethylene (MDPE), high density polyethylene (HDPE), metallocene-catalyzed polyethylene (mPE), very low density polyethylene (VLDPE), and/or ultralow density polyethylene (ULDPE). Also, at least two of the resins may be blended to achieve a desired range of physical or mechanical properties of the final film product. The blend ratios may range from 99:1 to 1:99. More preferably, the blend ratios range from 95:5 to 5:95. Even more preferably, the blend ratios range from 90:10 to 10:90.

15

20

65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213
2214
2215
2216
2217
2218
2219
2220
2221
2222
2223
2224
2225
2226
2227
2228
2229
2230
2231
2232
2233
2234
2235
2236
2237
2238
2239
2240
2241
2242
2243
2244
2245
2246
2247
2248
2249
2250
2251
2252
2253
2254
2255
2256
2257
2258
2259
2260
2261
2262
2263
2264
2265
2266
2267
2268
2269
2270
2271
2272
2273
2274
2275
2276
2277
2278
2279
2280
2281
2282
2283
2284
2285

respective percentages of weight and/or thickness of the layer with respect to the total weight and/or thickness indicated.

5

DETAILED DESCRIPTION OF THE INVENTION

The present invention relates to a stretch film comprising seven layers. The stretch films of the present invention are typically produced by the blown film or the cast film process. Films of the present invention include film constructions represented by, for example, of A/B/C/D/E/F/G where the A and G layers may be the same or different polymer resins, at least one of which is used for cling performance and the A, B, C, D, E, F and G layers or any combinations of said layers may be the same or different polymer resins selected for specific film end-use properties; A/C/B/C/D/C/E where A and E layers may be the same or different polymer resins, at least one of which is used for cling performance and A, B, C, D, and E layers and any combinations of said layers may be the same or different polymer resins for specific film end-use properties; A/B/C/D/E/B/F where A and F layers may be the same or different polymer resins , at least one of which is used for cling performance and A, B, C, D, E, and F layers or any combinations of said layers may be the

same or different polymer resins selected for specific film end-use properties. Additionally, the films may be represented as A/B/C/D/C/B/A, or the like, wherein the same letter represents a layer of the same composition.

5

Outer Layers

The stretch wrap film of the present invention comprises two outer layers.

For acceptable stretch film performance, it is expected that at least one outer layer has a cling characteristic allowing it to adhere to an adjacent wrapping of film when applied to a unitized load. The use of polyethylene containing high hexane extractables (i.e., about >3.5% by weight, for example) in the outermost layers for cling is disclosed in, for example, U.S. Patent Numbers 5,617,707; 5,516,475; 5,273,809; and 5,273,809; all of which are incorporated herein by reference. Concerns for having high hexane extractables containing polymers in the outermost layers exist because the high hexane extractables are believed to contribute to the problem of die lip build-up during extrusion and a build-up of low molecular weight olefinic material on fabrication equipment. Die lip build-up is typically degraded low molecular weight polyethylene and is undesirable because build up on the die lip can cause die lines that are inherent weak spots in film. Die lip build-up can also be pulled from the die as the film is extruded, resulting in black or brown spots

in the film that can cause premature failure in film performance and are aesthetically unpleasing. A build-up of low molecular weight olefinic material is undesirable because the film surface may be negatively affected as the film is pulled through the fabrication equipment and may result in inconsistent cling performance.

Another concern with higher levels of hexane extractables is the contribution they make to film blocking on the roll. Films that contain resins with high levels of hexane extractables in the outermost layers can block while on the roll making the film difficult to remove resulting in holes and tears in the film prior to application. Therefore, in preferred embodiments of the present invention, the stretch wrap films have a hexane extractable level of less than about 3.5 % by weight.

Using a tackifying or cling agent such as polybutene, polyisobutylene, and the like are also known in the art as disclosed in U.S. Patent Numbers 5,569,693; 5,212,001; 5,175,049; 5,173,343; 5,154,981; 5,147,709; 5,141,809; 5,114,763; and 5,112,674; all of which are incorporated herein by reference. Using a cling agent adds to the cost of the final product, requires either preblending or alterations to production equipment to incorporate, and requires aging to bloom to the surface, all of which are negative aspects of its use.

It has also been disclosed that copolymers of ethylene and functional copolymers such as acrylates and vinyl acetate may be used as cling agents. For example, see U.S. Patents 5,212,001; 5,173,343; 5,154,981; 5,141,809; 5,112,674; and 5,049,423; all of which are incorporated herein by reference.

5 The copolymers of mention tend to be more expensive than conventional low density polyethylenes (LDPE) and linear low density polyethylenes (LLDPE) commonly used in stretch cling film formulations and tend to have lower ultimate elongations than LLDPE resins, all of which are negative aspects for their use. Thus, in a preferred embodiment of the present invention, no cling
10 additives are used in the films of the present invention.

When only one layer is used for cling performance, the stretch film of the present invention may be used as a differential cling film.

Suitable polyethylene resins for cling use are conventional linear low density polyethylene (LLDPE), very low density polyethylene (VLDPE), and
15 ultralow density polyethylene (ULDPE) resins which are homopolymers, copolymers, or terpolymers, of ethylene and alpha-olefins. In copolymers, the weight percentages of the alpha-olefin is about 4 to 15% by weight, preferably from 6 to 12% by weight and more preferably from 6 to 10% by weight.

Applicable alpha-olefin comonomers include propylene, 1-butene, 1-pentene, 1-
20 hexene, 4-methyl-1-pentene, 1-octene, and 1-octene. The alpha-olefins range from about C₃ to C₂₀, preferably C₃ to C₁₀, more preferably from C₃ to C₈. The

resin melt index will typically be between 0.2 and 10 dg/min, preferably between 1 and 5 dg/min, and more preferably between 2 and 4 dg/min. Resin density will be between 0.860 and 0.940g/cc density, preferably between 0.875 and 0.925 g/cc, and more preferably between 0.890 and 0.920 g/cc. If the LLDPE resins contain hexane extractables, it is desired that the hexane extractables levels be below approximately 3.5 weight percent to minimize potential for film blocking, high unwind noise, roll telescoping, roll softness and die lip build-up. Roll telescoping occurs when the outer layers of the roll film sag due to high lubricity of the hexane extractables resulting in a roll that is not as uniform. The outer layers used for cling performance will each be approximately 1 to 20 weight percent of the total film weight, preferably 2 to 15 weight percent of the total film weight, and more preferably 5 to 7 weight percent of the total film weight.

The resins that can be used in the outer layers may optionally contain known and conventional cling additives to supplement the inherent cling characteristics of at least one of the outer layers. Typical cling additives are discussed in U.S. Patent 5,922,441, incorporated herein by reference. However, in a preferred embodiment of the invention, cling additives are not used. At least one of the two outer layers used for cling performance has an inherent cling performance without additives of at least 100 g/inch.

Inner Layers

The inner five layers are used for mechanical strength and stretchability. It is preferred that the inner five layers are different one to the other in that at least two different polymer resins are used in any combination to make up the five layers.

Suitable polyethylene resins used for strength are conventional linear low density polyethylene (LLDPE), very low density polyethylene (VLDPE), ultralow density polyethylene (ULDPE) resins, and metallocene catalyzed linear low density polyethylene (mLLDPE) which are homopolymers, terpolymers, or copolymers of ethylene and alpha-olefins. In copolymers, the weight percentage of the alpha-olefins resins is about 4 to 15% by weight, preferably from 6 to 12% by weight and more preferably from 6 to 10% by weight. Applicable alpha-olefin comonomers include propylene, 1-butene, 1-pentene, 1-hexene, 4-methyl-1-pentene, and 1-octene. The alpha-olefins range from about C₃ to C₂₀, preferably C₃ to C₁₀, more preferably from C₃ to C₈.

The resin melt index is between about 0.5 and about 10 dg/min, preferably between 1 and 5 dg/min, and more preferably between 1 and 3 dg/min. Resin density will be between 0.860 and 0.940g/cc density, preferably between 0.875 and 0.925 g/cc, and more preferably between 0.890 and 0.920 g/cc.

Also suitable for use in the inner five layers for obtaining strength properties is low density polyethylene homopolymers (LDPE). For the low density polyethylene homopolymers, the resin melt index is between about 0.2 and about 10 dg/min, preferably between 0.2 and 5 dg/min, and more preferably between 0.2 and 3 dg/min. The resin density is between about 0.860 and about 0.940 g/cc density, preferably between 0.880 and 0.930 g/cc, and more preferably between 0.900 and 0.925 g/cc.

Additionally, at least one of the five inner layers comprise metallocene catalyzed polyethylene with a melt index of 0.5 to 5 dg/min, preferably 0.5 to 3 dg/min and a melt flow ratio of 16 to 80, preferably 16 to 50, wherein said at least one of said five inner layers comprise 5 to 80 weight percent of the total film composition.

As stated above, the multi-layer stretch films of the present invention are typically produced by the blown film or cast film process. The blown or cast film is formed by extrusion. The extruder is a conventional one using a die, which will provide the desired gauge. Some useful extruders are described in US Patent numbers 4,814,135; 4,857,600; 5,076,988; 5,153,382; each of which are incorporated herein by reference. The gauge of the films of interest here can be in the range of about 0.3 to about 10 mils, preferably from about 0.5 to about 10 mils, and more preferably in the range of about 0.7 to about 2

65407-60057-60
mils. Examples of various extruders, which can be used in producing the film
of the present invention, are the single screw type modified with a blown film
die and air ring and continuous take off equipment. A typical single screw type
extruder can be described as one having a hopper at its upstream end and a
5 die at its downstream end. The hopper feeds into a barrel, which contains a
screw. At the downstream end, between the end of the screw and the die, is a
screen pack and a breaker plate. The screw portion of the extruder is
considered to be divided into three sections: the feed section, the compression
section, and the meeting section. Multiple heating zones are present from the
10 rear heating zone to the front heating zone, the multiple sections and zones
running from upstream to downstream. If it has more than one barrel, the
barrels are preferably connected in series. The length to diameter ratio of each
barrel is in the range of about 16:1 to about 30:1. The extrusion can take place
at temperatures in the range of about 160 to about 270 degrees Celsius, and is
15 preferably carried out at temperatures in the range of about 180 to about 240
degrees Celsius.

Conventional blown and cast film processes are described in
Fundamentals of Polymer Processing, Stanley Middleman, McGraw Hill, 1977;
Polymer Extrusion, Chris Rauwendall, Hanser Publishers, 1986; and The
20 Encyclopedia of Chemical Technology, Kirk-Othmer, John-Wiley and Sons,
1981; each of which are incorporated herein by reference.

When being applied to an article or pallet, the stretch wrap film of the present invention typically will be stretched to at least 150 to 350% of its original length, with the most common range being 200-250%.

The melt index of the layers of the films of the present invention is determined under ASTM D-1238, Condition E. It is measured at 190 degrees Celsius and 2.16 kilograms and reported as grams per 10 minutes. Flow index is determined under ASTM D-1238, Condition F. It is measured at 190 degrees Celsius and 10 times the weight used in determining the melt index, and reported as grams per 10 minutes. Melt flow ratio (MFR) is the ratio of flow index to melt index. It is understood by those skilled in the art that the lower the melt index or flow index, the higher the molecular weight. In the films of the present invention, the melt flow index range is typically from 0.2 to 10, preferably from 0.2 to 5, and more preferably from 0.2 to 3.

In another embodiment of the present invention, the stretch wrap film of the present invention may be used as a differential cling stretch wrap film. That is, the stretch wrap films of the present invention may comprise films whereby one outer layer has superior cling characteristics when applied in its stretched state and the other outer layer does not have superior cling characteristics. These types of films are commonly referred to as differential cling stretch wrap films or cling/slip films. Such a film may be advantageous when several pallets or articles wrapped with stretch film are loaded beside other wrapped articles.

The outer layer of the film wrapping a stored or loaded pallet or article (sometimes called the "slip" layer) does not have superior cling characteristics, and therefore does not cling to an adjacent pallet or article. Therefore, chances of tearing of the stretch wrap film are reduced.

5 An example of an outer "slip" or differential cling layer is the outer slip layer of US Patent 5,922,441 incorporated herein by reference. That is, the outer slip layer may be constructed of various resin materials suitable for such purposes. Examples of such resins include polyolefin resins and copolymers of polyolefins such as polyethylene, polypropylene, and combinations thereof.

10 Suitable polymer resins additionally include copolymers of polyethylene with minor amounts of other C₄₋₁₀ olefins, particularly C₆₋₈ polyolefins. Preferred polyethylenes include HPLDPE resins having a density of from about 0.92 to about 0.94 g/cm³, and a melt index (I₂) of from about 1.0 to about 4.0 g/10 min., and LLDPE resins having a density of from about 0.925 to about 0.945 g/cm³, and a melt index of from about 2.0 to about 5.0 g/10 min. Preferred

15 polymers include polypropylenes, preferably isotactic, having a density of from about 0.89 to about 0.91 g/cm³, and a melt index (I₂) of from about 5 to about 25 g/10 min. as determined by ASTM D1238.

 The outer slip layer may include any of several anti-cling, slip or anti-

20 block additives to improve the slip characteristics of the layer. Such additives include silicas, talcs, diatomaceous earth, silicates, lubricants, etc. These

additives are generally blended with the resin material in an amount of from about 100 to about 20,000 ppm. When an outer slip layer is present in the stretch wrap film, an outer high cling layer as described above will be located as an opposing layer.

5 The overall properties of the stretch wrap film of the present invention are such that they have a cling force at 0% elongation of about 100 grams to about 300 grams as measured according to ASTM D5458.

 Additionally, they have a relatively high puncture resistance as measured by the F-50 dart drop test procedure (ASTM D1709). It is the experience of
10 those skilled in the art that the F-50 dart drop test is well correlated to the end use puncture resistance of stretch wrap films. The F-50 dart drop of a stretch wrap film is at least 75 to 200 g/mil.

 The stretch wrap films of the present invention preferably have a overall transverse direction tear resistance (TD tear), as determined by ASTM D1922 of
15 at least about 400 to about 700 g/mil and MD Elmendorf tear of at least about 50 g/mil to about 350 g/mil.

 In other embodiments of the present invention, the multi-layer, thermoplastic stretch wrap film of the present invention has a MD tensile elongation (%) of 400 to 700, a TD tensile elongation (%) of 600 to 900, a MD
20 Elmendorf tear (g/mil) of 200 to 400, a TD Elmendorf tear (g/mil) of 450 to 700, and a dart impact (g) of from 100 to 300.

The stretch wrap films of the present invention are capable of being stretched from at least about 100% to about 400% of their original lengths, preferably about 150% to about 300%.

The overall thickness of the stretch wrap film of the present invention can vary widely depending upon the particular end use as determined by one of ordinary skill in the art, but the thickness is generally in the range of the typical thickness for stretch wrap films. Thus, the thickness is not known to be critical and can be easily adjusted by one of ordinary skill in the art to fit the appropriate end use. Conventional for such films is a thickness of from about 0.4 to about 3 mils, and the application is specific.

The individual layers, described as percentages by weight independent of thickness, vary from about 1% to about 30% of the total thickness of the film. The two outer layers are typically from 1 to 20% each, preferably from 2 to 10% each, more preferably from 5 to 7% each, regardless of the presence of a differential cling layer. The thickness the inner layers is typically from about 5 to 28%.

For example, the seven polymeric layers may be represented by the formula A/C/B/C/D/C/E, wherein the relative composition of the layers is 10/20/10/20/10/20/10 in % thickness and/or parts by weight. Also, the seven polymeric layers may be represented by the formula A/C/B/C/D/C/E,

wherein the relative composition of the layers is 7/24/7/24/7/24/7 in % thickness and/or parts by weight.

In one embodiment of the present invention, the multi-layer, thermoplastic stretch wrap film of comprises seven polymeric layers are

5 represented by the following formula: A/C/B/C/D/C/E, wherein

A represents :

a C₂/C₄/C₆ very low density polyethylene terpolymer with a melt index of 2.5 dg/min and a resin density of 0.910 g/cc, with a thickness of 2% of the total thickness of said stretch wrap film, or

10 a C₂/C₆ linear low density polyethylene copolymer blended with a C₂/C₃ copolymer to form a polymer with a melt index of 2.5 dg/min and a resin density of 0.915 , with a thickness of 5% of the total thickness of the stretch wrap film;

B and D represent:

15 a C₂/C₆ metallocene catalyzed copolymer resin with a melt index of 1 or 2.5 dg/mm and a resin density of 0.910 g/cc and a melt flow ratio of 16-20 g/10 min; wherein D and D have a thickness of 7 to 10% of the total thickness of the stretch wrap film;

C represents :

20 a C₂/C₆ linear low density polyethylene copolymer with a melt index of 2 dg/mm and a resin density of 0.917 g/cc, or

a C₂/C₆ linear low density polyethylene copolymer with a melt index of 2 dg/mm and a resin density of 0.917 g/cc blended with a low density polyethylene homopolymer with a melt index of 0.2 to 2 dg/mm at a ratio of 95:5 to 75:25; wherein C has a thickness of 60 to 81% of the total thickness of the stretch wrap film; and

E represents:

a C₂/C₄ linear low density polyethylene copolymer with a melt index of 2 dg/mm, or

a C₂/C₆ linear low density polyethylene copolymer with a melt index of 3 dg/mm and a resin density of 0.917 g/cc, wherein E has a thickness of 5 to 10% of the thickness of the stretch wrap film.

In another embodiment of the present invention, the seven polymeric layers are represented by the following formula: A/C/B/C/D/C/E, wherein

A represents:

a C₂/C₄/C₆ very low density polyethylene terpolymer with a melt index of 2.5 dg/min and a resin density of 0.910 g/cc, with a thickness of 2% of the total thickness of said stretch wrap film, or

a C₂/C₆ linear low density polyethylene copolymer blended with a C₂/C₃ copolymer to form a polymer with a melt index of 2.5 dg/min and a resin density of 0.915, with a thickness of 5% of the total thickness of the stretch wrap film;

B and D represent:

a C₂/C₆ metallocene catalyzed resin copolymer with a melt index of 1 dg/mm and a resin density of 0.917 g/cc and a melt flow ratio of 16-20 g/10 min; wherein B and D have a thickness of 7 to 10% of the total thickness of the stretch wrap film;

C represents:

a blend of a C₂/C₆ linear low density polyethylene copolymer with a melt index of 1 dg/mm and a low density polyethylene with a melt index of 2 dg/mm in a ratio of 95:5 to 75:25; wherein C has a thickness of 60 to 81% of the total thickness of the stretch wrap film; and

E represents:

a C₂/C₄ linear low density polyethylene copolymer with a melt index of 2 dg/mm, or

a C₂/C₆ linear low density polyethylene copolymer with a melt index of 3 dg/mm and a resin density of 0.917 g/cc, wherein E has a thickness of 5 to 10% of the thickness of the stretch wrap film.

In yet another embodiment of the present invention, the seven polymeric layers are represented by the following formula: A/C/B/C/D/C/E, wherein

A and E represent:

5 a C₂/C₄ linear low density polyethylene copolymer with a melt index of 2 dg/min and a resin density of 0.910 g/cc, with a thickness of 5 to 10% each of the total thickness of said stretch wrap film,

B and D represent:

5 a C₂/C₆ linear low density polyethylene copolymer resin with a melt index of 2 dg/mm and a resin density of 0.910 g/cc, with a thickness of 7 to 10% of the total thickness of the stretch wrap film; and

C represents:

10 a blend of a C₂/C₄ linear low density polyethylene copolymer with a melt index of 2 dg/mm and a density of 0.910 g/cc, with a thickness of 60 to 81% each of the total thickness.

The following example is given for illustration of the invention and is not intended to be limiting thereof.

Example

This example demonstrates the advantage of films of the present invention that contain seven layers over films containing five layers.

15 A five layer film with a layer configuration of A/B/C/B/A with relative compositions of these layers being 10/10/60/10/10 parts by weight are prepared on a cast film line with layer A and layer B extruders having barrel diameters of 1.5 inches with L/D 30:1 and layer C extruder having a barrel

66EPT-500460
diameter of 3 inches and L/D of 30:1. Extrusion melt temperatures are
between 500 and 575°F with output rates set to give film production line
speeds of approximately 1000 feet/min. Resins used to produce a five-layer
film sample are as follows: A is a nominal 3.2 dg/min melt index, 0.917 g/cc
5 density gas-phase produced hexene copolymer LLDPE; B is a nominal 2.5
dg/min melt index, 0.917 g/cc density gas-phase produced hexene copolymer
metallocene catalyzed LLDPE; and C is a nominal 2.0 dg/min melt index, 0.917
g/cc density gas-phase produced hexene-copolymer LLDPE.

The inventive example is a seven-layer film with a layer configuration of
10 A/C/B/C/D/C/E, with relative compositions of these layers of
10/20/10/20/10/20/10 parts by weight. The inventive example is prepared on
a cast film line with A, B, D, and E extruders having barrel diameters of 2.5
inches and L/D of 30:1; and C extruder having a barrel diameter of 6 inches
with L/D of 30:1. Extrusion melt temperatures are between 500 and 575°F
15 with output rates set to give film production line speeds of approximately 1000
feet/min. A and E are a nominal 3.2 dg/min melt index, 0.917 g/cc density
gas-phase produced hexene-copolymer LLDPE, B and D are a nominal 2.5
dg/min melt index, 0.917 g/cc density gas-phase produced hexene copolymer
metallocene catalyzed LLDPE; and C is a nominal 2.0 dg/min melt index, 0.917
20 g/cc density gas-phase produced hexene-copolymer LLDPE.

Film properties are tested according to ASTM procedures. Table 1 indicates the mechanical properties advantages found using seven film layers compared to five layer films.

Property	ASTM Method	5-layer Film	7-layer Film
Film Thickness (mil)		0.8	0.8
MD Tensile Elongation (%)	D882	470	650
TD Tensile Elongaion (%)	D882	670	770
MD Elmendorf Tear (g/mil)	D1922	230	320
TD Elmendorf Tear (g/mil)	D1922	560	580
Dart Impact (g)	D1709	140	160

As is demonstrated by the above table, film made according to the invention has higher elongation and better toughness than a film made with a similar polymer resin having less than seven layers.

5

The invention thus being described, it will be obvious that the same may be varied in many ways. Such variations are not regarded as a departure from the spirit and scope of the present invention, and all such modifications as

would be obvious to one of ordinary skill in the art are intended to be included within the scope of the following claims.

We claim:

1. A multi-layer, thermoplastic stretch wrap film containing seven polymeric layers, comprising:

(a) two outer layers, at least one of which having a cling performance of at least 100 grams/inch, said outer layer being selected from the group consisting of linear low density polyethylene, very low density polyethylene, and ultra low density polyethylene resins, said resins being homopolymers, copolymers, or terpolymers, of ethylene and alpha-olefins; and

(b) five inner layers, with each layer being selected from the group consisting of linear low density polyethylene, very low density polyethylene, ultra low density polyethylene, and metallocene-catalyzed linear low density polyethylene resins, said resins being homopolymers, copolymers, or terpolymers, of ethylene and alpha-olefins.

2. The multi-layer, thermoplastic stretch wrap film of claim 1, wherein said alpha olefins are propylene, 1-butene, 1-pentene, 1-hexene, 4-methyl-1-pentene, or 1-octene and range from C₃ to C₂₀.

3. The multi-layer, thermoplastic stretch wrap film of claim 1, wherein no cling additives are present in said stretch wrap film.

4. The multi-layer, thermoplastic stretch wrap film of claim 2,
wherein said alpha-olefins range from C₃ to C₈.

5. The multi-layer, thermoplastic stretch wrap film of claim 1,
5 wherein said copolymers has an alpha-olefin weight percentage of 4 to 15% by
weight.

6. The multi-layer, thermoplastic stretch wrap film of claim 1,
wherein, wherein the resin melt index for each outer layer is 0.2 to 10 dg/min.

7. The multi-layer, thermoplastic stretch wrap film of claim 1,
wherein, wherein the resin melt index for each inner layer is 0.5 to 10 dg/min.

8. The multi-layer, thermoplastic stretch wrap film of claim 1,
15 wherein the resin density for each layer is about 0.860 to 0.940.

9. The multi-layer, thermoplastic stretch wrap film of claim 1,
wherein the hexane extractable level is below 3.5 weight percent.

20 10. The multi-layer, thermoplastic stretch wrap film of claim 1,
wherein the outer layers are 5 to 7 weight percent of the total film weight.

11. The multi-layer, thermoplastic stretch wrap film of claim 1,
wherein at least one said inner layer comprises low density polyethylene
homopolymers, wherein said low density polyethylene homopolymers have a
melt index of between about 0.2 to 10 dg/min; and a resin density of between
about 0.86 to 0.94 g/cc.

12. The multi-layer, thermoplastic stretch wrap film of claim 1, which
further comprises one outer layer with substantially no inherent cling
characteristics.

13. The multi-layer, thermoplastic stretch wrap film of claim 1,
wherein the cling force at 0% elongation is about 100 grams to 300 grams as
measured according to ASTM D5458.

14. The multi-layer, thermoplastic stretch wrap film of claim 1,
wherein the transverse directional tear resistance is at least about 400 to 700
g/mil as determined by ASTM D1922 and a MD Elmendorf tear resistance of
at least about 50 g/mil to 350 g/mil.

15. The multi-layer, thermoplastic stretch wrap film of claim 1,
wherein said outer layers have a thickness of 5 to 7% each of the total
thickness of the film, and

said five inner layers have a thickness of 5 to 28% each of the total
thickness of the film.

16. The multi-layer, thermoplastic stretch wrap film of claim 1,
wherein said seven polymeric layers are represented by the following formula:
A/C/B/C/D/C/E, wherein the relative composition of the layers is
10/20/10/20/10/20/10, % thickness and/or parts by weight, respectively,
with A and E representing a linear low density polyethylene hexene-copolymer,
B and D representing a metallocene catalyzed linear low density polyethylene
copolymer, and C represents a linear low density polyethylene hexene-
copolymer.

17. The multi-layer, thermoplastic stretch wrap film of claim 16,
wherein layers A and E have a melt index of 3.2 dg/min and a density of 0.917
g/cc; layers B and D have a melt index of 2.5 dg/min and a density of 0.917
g/cc; and layer C has a melt index of 2.0 dg/min and a density of 0.917 g/cc.

18. The multi-layer, thermoplastic stretch wrap film of claim 1,
wherein said stretch wrap film has a MD tensile elongation (%) of 400 to 700, a
TD tensile elongation (%) of 600 to 900, a MD Elmendorf tear (g/mil) of 200 to
400, a TD Elmendorf tear (g/mil) of 450 to 700, and a dart impact (g) of from
5 100 to 300.

19. The multi-layer, thermoplastic stretch wrap film of claim 1,
wherein said seven polymeric layers are represented by the following formula:
A/C/B/C/D/C/E, wherein

A represents :

a C₂/C₄/C₆ very low density polyethylene terpolymer with a melt
index of 2.5 dg/min and a resin density of 0.910 g/cc, with a thickness of 2%
of the total thickness of said stretch wrap film, or

a C₂/C₆ linear low density polyethylene copolymer blended with a
15 C₂/C₃ copolymer to form a polymer with a melt index of 2.5 dg/min and a resin
density of 0.915 , with a thickness of 5% of the total thickness of the stretch
wrap film;

B and D represent:

a C₂/C₆ metallocene catalyzed copolymer resin with a melt index of 1 or
20 2.5 dg/mm and a resin density of 0.910 g/cc and a melt flow ratio of 16-20

g/10 min; wherein D and D have a thickness of 7 to 10% of the total thickness of the stretch wrap film;

C represents :

5 a C₂/C₆ linear low density polyethylene copolymer with a melt index of 2 dg/mm and a resin density of 0.917 g/cc, or

a C₂/C₆ linear low density polyethylene copolymer with a melt index of 2 dg/mm and a resin density of 0.917 g/cc blended with a low density polyethylene homopolymer with a melt index of 0.2 to 2 dg/mm at a ratio of 95:5 to 75:25; wherein C has a thickness of 60 to 81% of the total thickness of the stretch wrap film; and

E represents:

a C₂/C₄ linear low density polyethylene copolymer with a melt index of 2 dg/mm, or

15 a C₂/C₆ linear low density polyethylene copolymer with a melt index of 3 dg/mm and a resin density of 0.917 g/cc, wherein E has a thickness of 5 to 10% of the thickness of the stretch wrap film.

20. The multi-layer, thermoplastic stretch wrap film of claim 1, wherein said seven polymeric layers are represented by the following formula:

20 A/C/B/C/D/C/E, wherein

A represents:

a C₂/C₄/C₆ very low density polyethylene terpolymer with a melt index of 2.5 dg/min and a resin density of 0.910 g/cc, with a thickness of 2% of the total thickness of said stretch wrap film, or

a C₂/C₆ linear low density polyethylene copolymer blended with a C₂/C₃ copolymer to form a polymer with a melt index of 2.5 dg/min and a resin density of 0.915 , with a thickness of 5% of the total thickness of the stretch wrap film;

B and D represent:

a C₂/C₆ metallocene catalyzed copolymer resin with a melt index of 1 dg/mm and a resin density of 0.917 g/cc and a melt flow ratio of 16-20 g/10 min; wherein B and D have a thickness of 7 to 10% of the total thickness of the stretch wrap film;

C represents:

a blend of a C₂/C₆ linear low density polyethylene copolymer with a melt index of 1 dg/mm and a low density polyethylene with a melt index of 2 dg/mm in a ratio of 95:5 to 75:25; wherein C has a thickness of 60 to 81% of the total thickness of the stretch wrap film; and

E represents:

a C₂/C₄ linear low density polyethylene copolymer with a melt index of 2 dg/mm, or

a C₂/C₆ linear low density polyethylene copolymer with a melt index of 3 dg/mm and a resin density of 0.917 g/cc, wherein E has a thickness of 5 to 10% of the thickness of the stretch wrap film.

5 21. The multi-layer, thermoplastic stretch wrap film of claim 1, wherein said seven polymeric layers are represented by the following formula: A/C/B/C/D/C/E, wherein

A and E represent:

10 a C₂/C₄ linear low density polyethylene copolymer with a melt index of 2 dg/min and a resin density of 0.910 g/cc, with a thickness of 5 to 10% each of the total thickness of said stretch wrap film,

B and D represent:

15 a C₂/C₆ linear low density polyethylene copolymer resin with a melt index of 2 dg/mm and a resin density of 0.910 g/cc, with a thickness of 7 to 10% of the total thickness of the stretch wrap film; and

C represents:

20 a blend of a C₂/C₄ linear low density polyethylene copolymer with a melt index of 2 dg/mm and a density of 0.910 g/cc, with a thickness of 60 to 81% each of the total thickness.

22. The multi-layer, thermoplastic stretch wrap film of claim 1, wherein at least one of said five inner layers comprise metallocene catalyzed

polyethylene with a melt index of 0.5 to 5 dg/min and a melt flow ratio of 30 to 50 g/10 min, wherein said at least one of said five inner layers comprise 5 to 80 weight percent of the total film composition.

5 23. The multi-layer, thermoplastic stretch wrap film of claim 1, wherein the dart impact as measured by the F-50 dart drop test procedure is at least 75 to 200 g/mil.

10 24. The multi-layer, thermoplastic stretch wrap film of claim 1, wherein the melt flow index is between 0.2 and 10.

15 25. The multi-layer, thermoplastic stretch wrap film of claim 1, wherein at least one layer contains blends of at least two of said resins.

20 26. The multi-layer, thermoplastic stretch wrap film of claim 1, wherein said seven polymeric layers are represented by the following formula:
A/C/B/C/D/C/E, wherein the relative composition of the layers is
7/24/7/24/7/24/7, % thickness and/or parts by weight, respectively, with A
and E representing a linear low density polyethylene hexene-copolymer, B and
D representing a metallocene catalyzed linear low density polyethylene

copolymer, and C represents a linear low density polyethylene hexene-copolymer.

27. The multi-layer, thermoplastic stretch wrap film of claim 1,
5 wherein the resin density for each layer is about 0.880 to 0.930.

28. The multi-layer, thermoplastic stretch wrap film of claim 1,
wherein the resin density for each layer is about 0.900 to 0.925.

29. A multi-layer, thermoplastic stretch wrap film containing seven
10 polymeric layers, comprising:

(a) two outer layers, at least one of which having a cling performance of
at least 100 grams/inch, said outer layer being selected from the group
consisting of linear low density polyethylene, very low density polyethylene, and
15 ultra low density polyethylene resins, said resins being homopolymers,
copolymers, or terpolymers, of ethylene and alpha-olefins; and

(b) five inner layers, with each layer being selected from the group
consisting of linear low density polyethylene, very low density polyethylene,
ultra low density polyethylene, and metallocene-catalyzed linear low density
20 polyethylene resins, said resins being homopolymers, copolymers, or
terpolymers, of ethylene and alpha-olefins,

wherein at least one of said inner layers comprises a metallocene catalyzed linear low density polyethylene resin with a melt index of 0.5 to 3 dg/min and a melt index ratio of 16 to 80.

ABSTRACT

A novel multi-layer stretch film comprising at least 7 layers and having excellent mechanical properties and stretch film performance, comprising two outer, or skin layers that have moderate to high controlled cling and low blocking characteristics, and at least five internal layers to assist in producing mechanical strength and stretchability. The resins used in the film composition include polypropylene (PP), ethylene propylene copolymers, low density polyethylene (LDPE), linear low density polyethylene (LLDPE), medium density polyethylene (MDPE), high density polyethylene (HDPE), metallocene-catalyzed polyethylene (mPE), very low density polyethylene (VLDPE), and/or ultralow density polyethylene (ULDPE). The resins also may be blended to achieve a desired range of physical or mechanical properties of the final film product.

Figure 1

Prior Art


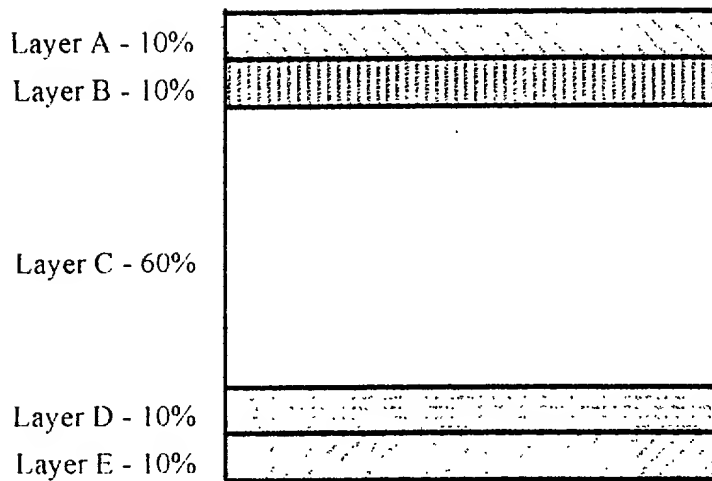


Figure 2

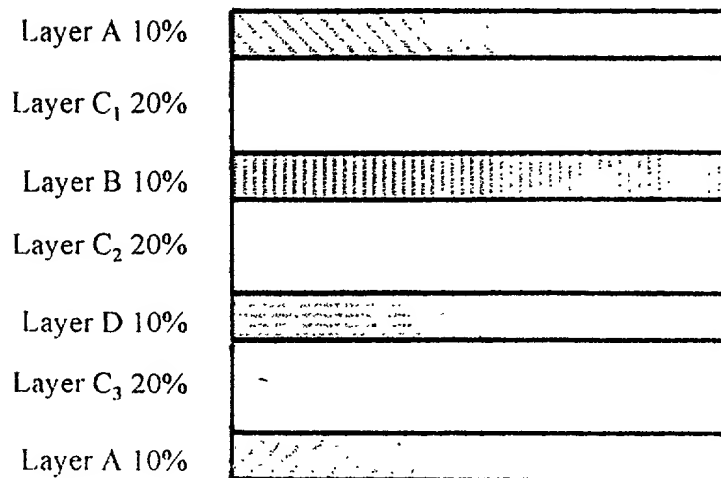

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name; that

I believe I am an original, first and joint inventor of the invention entitled "MULTI-LAYER STRETCH CLING FILM" described and claimed in the attached specification.

I have reviewed and understand the contents of the specification, including the claims, in the above-referenced application, as amended by any amendment specifically referred to in the Declaration.

I acknowledge my duty pursuant to 37 C.F.R. §1.56 to disclose information of which I am aware which is material to the patentability of this application.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

None.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that

SECRET 6087460

willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

I hereby appoint the following attorneys to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

Mark J. Patterson (Reg. No. 30,412)
I. C. Waddey, Jr. (Reg. No. 25,180)
Edward D. Lanquist, Jr. (Reg. No. 33,729)
Lucian Wayne Beavers (Reg. No. 28,183)
John C. Garvin, Jr. (Reg. No. 20,542)
Laura K. Thomas (Reg. No. 39,856)
Emily A. Shouse (Reg. No. 44,336)
David B. Pieper (Reg. No. 42,998)
Richard S. Myers, Jr. (Reg. No. 42,022)
414 Union Street, Suite 2020
Bank of America Plaza
Nashville, TN 37219
(615) 242-2400

Address all telephone calls to Richard S. Myers, Jr. at telephone number (615) 242-2400.

Address all correspondence to:

Richard S. Myers, Jr.
Waddey & Patterson
414 Union Street, Suite 2020
Bank of America Plaza
Nashville, TN 37219

Full name of Inventor:

David Simpson

Inventor's signature:

A handwritten signature in black ink, appearing to read 'David Simpson', written over a horizontal line.

13 OCT 99

Date

Residence:

1719 Joben Drive
Murfreesboro, TN 37128

Citizenship:

United States

Post Office Address:

1719 Joben Drive
Murfreesboro, TN 37128

Full name of Inventor:

Terry Jones

Inventor's signature:



10-13-99

Date

Residence:

439 Royal Glen Blvd.
Murfreesboro, TN 37128

Citizenship:

United States

Post Office Address:

439 Royal Glen Blvd.
Murfreesboro, TN 37128

666707-60067450